


Inlet air temperature	[°C]	5.00	Temperatura parowania	[°C]	-2.00
DT	[K]	7.00	Refrigerant*		R404A
Minimalna ilość chłodziw w komorze		0	Wysokość nad poziomem morza	[m]	0.0
Wymiennik ciepła	Aluminium fin		Obudowa	Standard	
Zasilanie wentylatora	Standard		Wentylatory	AC motors	
Odtajanie	Absent				
Selected model:1 x EVS 101					
Capacity	[kW]	0.86	Margin	[%]	0.0
DT	[K]	7.0	Tot. air flow	[m³/h]	580.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	41 (5m)			

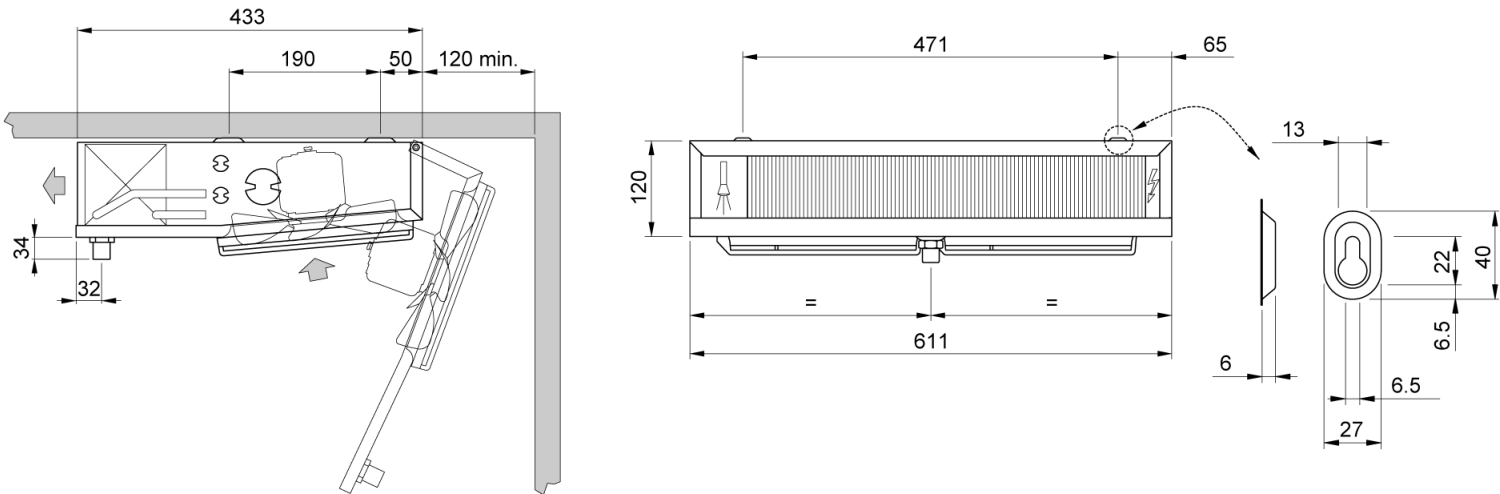

Weight	kg	6.700	PED Category		Cat I
			Design Pressure PS	[bar]	30
Internal surface	m²	0.32	External surface	m²	2.80
Inlet connection		10 mm	Output connection		10 mm
Total circuit capacity	dm³	0.5	Fin spacing	mm	3.5 / 7
Drain connection		1/2" GAS			
Fan Motors	n.	2	Diameter	mm	200
Air flow	m³/h	580	Air throw	m	5.0
Feed	V	230/1/50-60	Rotation speed	rpm	1300
Fan Motor	A	0.70	Absorbed power	W	106
Pres.S.Lev. 5 m.	dB(A)	41			

Heat exchanger

Aluminium fin

EUR 0.00

Casing

Standard

EUR 0.00

Fan motor feed

Standard

EUR 0.00

Type of fan motor

AC motors

EUR 0.00

Defrost

Absent

EUR 0.00

Base Price

EUR 0.00

Surcharge Water Version

EUR 0.00

Total Options

EUR 0.00

Total Price

EUR 0.00



* The safety requirements for the use of refrigerants must comply with the provisions of the EN378 standards and the safety data sheets of each fluid used. The risk assessment for the use of A2L mid-flammable refrigerants shall be conducted by the user based on site requirements

We shall not be liable for the performance and the quality of sold products, if fitted or connected fan motor speed regulation or control systems are different from the ones proposed or installed by us.