


UP-SE2008GS-EAE00



ENGINEERING CODE
5S3BOS6C3FI

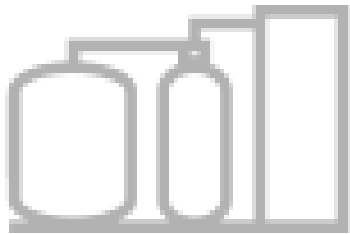

REFRIGERANT
R-449A



POWER SUPPLY
380-420 V 50 Hz
/ 460 V 60 Hz



APPLICATION
LBP



MOTOR TYPE
3PH



STANDARD
EN13215_RG20



COOLING CAPACITY
1603 W



EFFICIENCY
1.08 W/W

Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-35	1698	1326.5	1.28

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-35	1603	1489.6	1.08

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-35	1412	1868.9	0.76