


UP-NJX2219GS-EAE00



ENGINEERING CODE
545ASB6C3FI

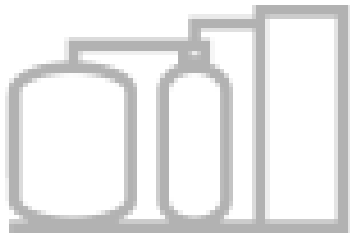

REFRIGERANT
R-404A



POWER SUPPLY
380-420 V 50 Hz
/ 460 V 60 Hz



APPLICATION
LBP



MOTOR TYPE
3PH



STANDARD
EN13215_RG20



COOLING CAPACITY
1213 W



EFFICIENCY
1.12 W/W

Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-35	1335	1047.1	1.27

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-35	1213	1082.9	1.12

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-35	985	1125.6	0.88