


Inlet air temperature	[°C]	0.00	Temperatura parowania	[°C]	-8.00
DT	[K]	8.00	Refrigerant*		R404A
Minimalna ilość chłodziw w komorze		0	Wysokość nad poziomem morza	[m]	0.0
Wymiennik ciepła	Aluminium fin		Obudowa	Standard	
Zasilanie wentylatora	Standard		Wentylatory	AC motors	
Odtajanie	Absent				
Selected model:* 1 x GCE 253E4					
Capacity	[kW]	4.83	Margin	[%]	0.0
DT	[K]	8.0	Tot. air flow	[m³/h]	2304.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	41 (5m)			

* Provide an appropriate defrosting system and number of defrost cycles

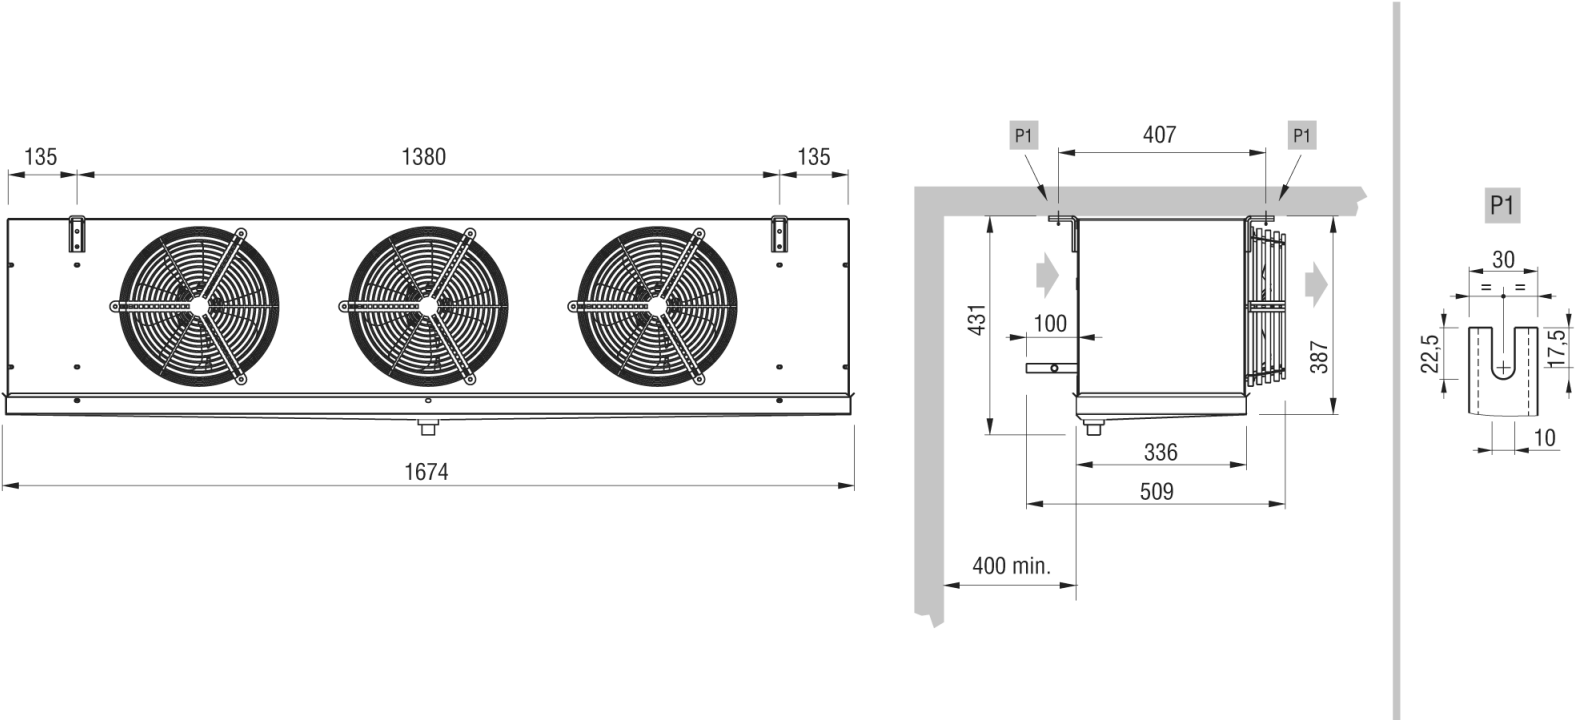

Weight	kg	33.000	PED Category		Cat I
			Design Pressure PS	[bar]	30
Internal surface	m²	2.19	External surface	m²	29.10
Inlet connection		12 mm	Output connection		22 mm
Total circuit capacity	dm³	3.2	Fin spacing	mm	4
Drain connection		1" GAS			
Fan Motors	n.	3	Diameter	mm	250
Air flow	m³/h	2304	Air throw	m	10.0
Feed	V	230/1/50-60	Rotation speed	rpm	1300
Fan Motor	A	2.04	Absorbed power	W	285
Pres.S.Lev. 5 m.	dB(A)	41			