


UP-SE2010GS-EAE00



ENGINEERING CODE  
5S3COS6C3FI

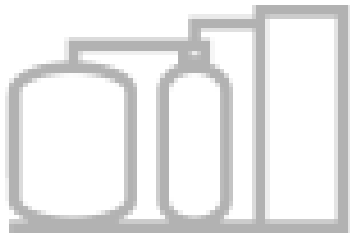

REFRIGERANT  
R-449A



POWER SUPPLY  
380-420 V 50 Hz  
/ 460 V 60 Hz



APPLICATION  
LBP



MOTOR TYPE  
3PH



STANDARD  
EN13215\_RG20



COOLING CAPACITY  
1866 W



EFFICIENCY  
1.07 W/W

Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

| Evaporating Temperature °C | Cooling Capacity W | Power Consumption W | Efficiency W/W |
|----------------------------|--------------------|---------------------|----------------|
| -35                        | 1982               | 1545.5              | 1.28           |

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

| Evaporating Temperature °C | Cooling Capacity W | Power Consumption W | Efficiency W/W |
|----------------------------|--------------------|---------------------|----------------|
| -35                        | 1866               | 1743.7              | 1.07           |

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

| Evaporating Temperature °C | Cooling Capacity W | Power Consumption W | Efficiency W/W |
|----------------------------|--------------------|---------------------|----------------|
| -35                        | 1635               | 2207.8              | 0.74           |