


UP-NTU6238GKV-EAE00



ENGINEERING CODE
605EAS6C4FI

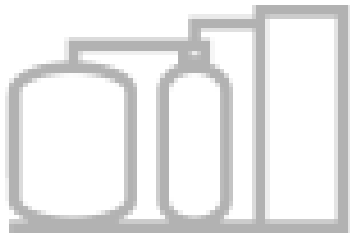

REFRIGERANT
R-449A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
HBP



MOTOR TYPE
CSR



STANDARD
EN13215_RG20



COOLING CAPACITY
2321 W



EFFICIENCY
2.09 W/W



Performance Data Sheet according to EU Regulation 2015/1095

PERFORMANCE CURVE

Parameters at full load and ambient temperature 25 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	2543	1039.1	2.45

PERFORMANCE CURVE

Parameters at full load and ambient temperature 32 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	2321	1111.7	2.09

PERFORMANCE CURVE

Parameters at full load and ambient temperature 43 °C

Evaporating Temperature °C	Cooling Capacity W	Power Consumption W	Efficiency W/W
-10	1916	1212.7	1.58